

winflow

winHood | W2




WinHood-W2 has primarily been designed for centralized systems of exhaust ventilation in multi apartment buildings. Because of the connection size of the hood, it's functional in decentralized ventilation systems also if pressure level in duct system is sufficient.

The W2 is part of the Winflow's design hood- collection. It is visually pretentious, combining stainless steel and dark glass. W2 is also very user friendly and easy to install on the wall.

Interface of the hood is glass surfaced and it responses to with touch. It includes electrically functioning open-close-mechanism. It closes manually with a touch switch. Light-function operates similarly. W2 is available 600 mm wide.


winflow

winHood | W2

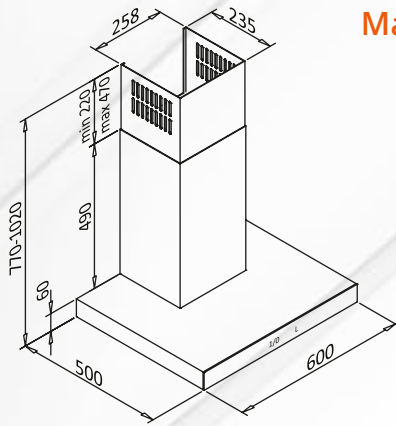

W2 600

Main dimensions:

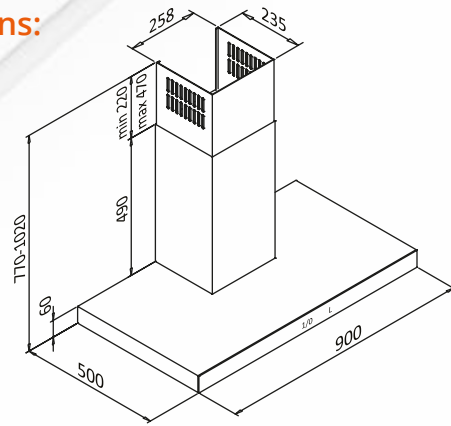

W2 900

WinHood-W2 is simple and rapidly mountable hood. Its package includes the rack for wall installation, in which the hood is lifted and locked with screw.

- The W2 can be connected to duct system with sealed connector with diameter of 160 mm.
- When connecting to a smaller duct reduction piece must be used.
- W2 is equipped with covering parts functioning telescopically according to the height.
- The W2 has schuko-type connecting plug acting also as main switch.

Grease filters are easy to remove and wash.

WinHood-W2-600 pressure drop:

Ordering code:

WinHood-W2-600

LVI-number 600: 7921602

More information:

info@winflow.fi

