

winflow

winHood | W3



WinHood-W3 has primarily been designed for centralized systems of exhaust ventilation in multi apartment buildings. Because of the connection size of the hood, it can be used in decentralized ventilation systems also if pressure level in duct system is sufficient.


The W3 is part of the Winflow's design hood- collection. It is visually elegant and light looking, totally made of stainless steel. W3 is also very user friendly and easy to install on the wall.

It includes electrically functioning open-close-mechanism used with a button. Status of the hood is shown by led. Light-function operates similarly. W3 is available 600 mm wide.


winflow

winHood | W3

Main dimensions:

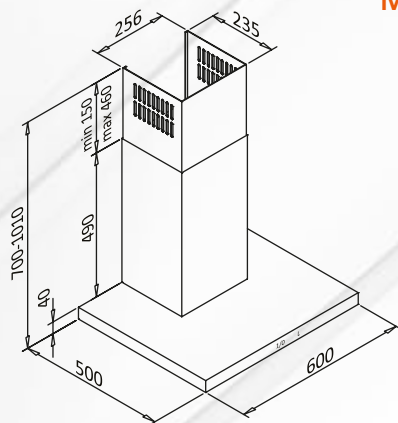

W3 600

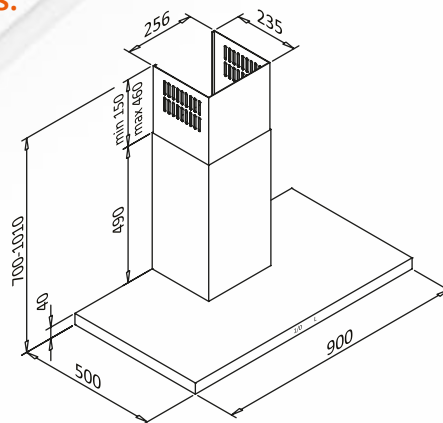

W3 900

WinHood-W3 is simple and rapidly mountable hood. Its package includes the rack for wall installation, in which the hood is lifted and locked with screw.

- The W3 can be connected to duct system with sealed connector with diameter of 160 mm.
- When connecting to a smaller duct reduction piece must be used.
- W3 is equipped with covering parts functioning telescopically according to the height.
- The W3 has schuko-type connecting plug acting also as main switch.

Grease filters are easy to remove and wash.

WinHood-W3-600 pressure drop:

Ordering code:

WinHood-W3-600

LVI-number 600: 7921604

More information:

info@winflow.fi

